


This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of MPD.

REV	DESCRIPTION	DSG	APR	DATE

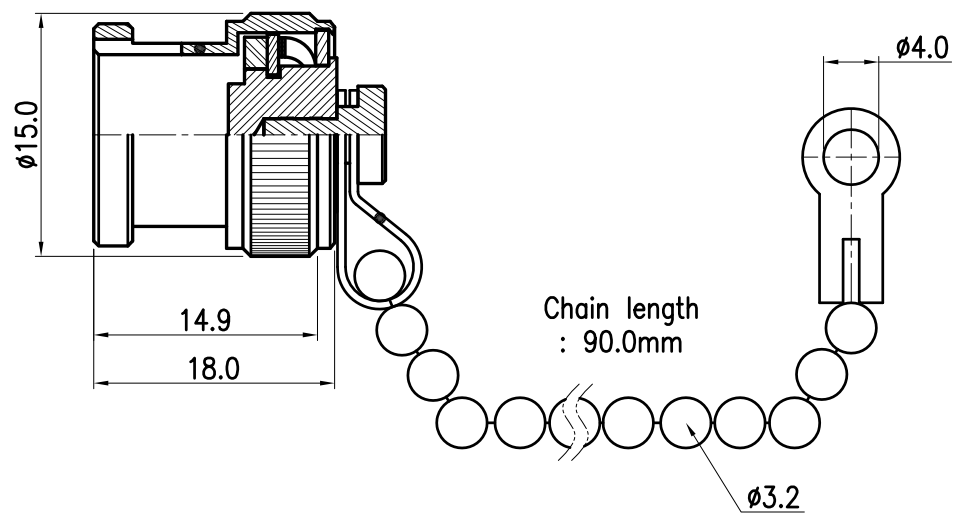

NOTE :

- Interface : IEC 169-8  
MIL-C-39012, BNC
- Material and finish  
Body, Coupling Nut : Brass / Ternary-alloy
- Environmental data  
Operating Temperature : -45 ~ 120C°  
2002/95/EC (RoHS) : Compliant

<small>UNLESS OTHERWISE SPECIFIED : ALL DIMS IN MILLIMETERS TOLERANCES ON DECIMALS 1 PLACE ±0.20 AGGLE ±1.0° 1.6σ 2 PLACE ±0.10 REMOVE BURRS, BREAK SHARP EDGES</small>				<b>THIRD ANGLE</b> 		 <small>MICROWAVE PASSIVE DEVICE</small>	
<b>DRAW</b>	<b>DESIGN</b>	<b>CHECK</b>	<b>APPRO.</b>	<b>TITLE</b> PROTECTIVE CAP & SHORTS BNC FOR FEMALE (E1F55161000001)			
<i>JM_PARK</i>	<i>JM_PARK</i>		<i>WY_CHO</i>				
2007. 1.06	2007. 1.06		2007. 1.06	<b>SIZE</b> A4		<b>DWG NO.</b> Q9905-030	
<b>Material</b> SEE NOTE 2.			<b>Finish</b> SEE NOTE 2.		<b>REV</b> A		
Scale : NS Do Not Scale Drawing 1 of 1							