


This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of MPD.

REV	DESCRIPTION	DSG	APR	DATE

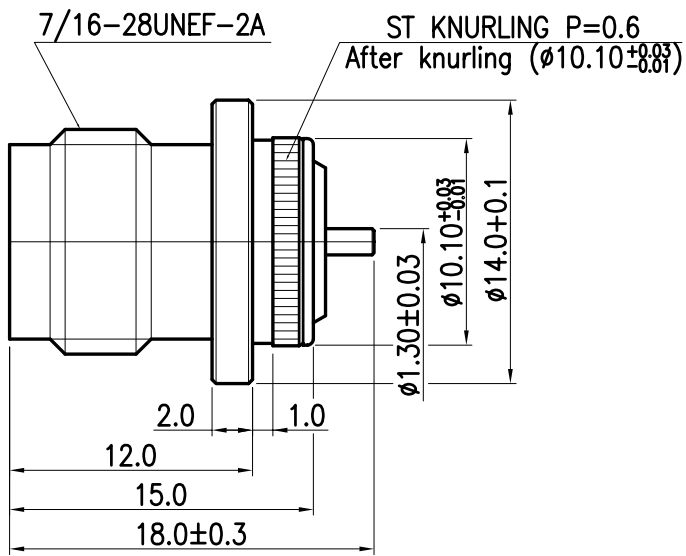

NOTE :

- Interface : IEC 169-17
MIL-STD-348A, TNC
- Material and Finish
Center contact : Beryllium-copper / Gold
Body : Brass / Ternary-alloy
Insulator : PTFE
- Environmental data
Operating Temperature : -45 ~ 120°C
2002/95/EC (RoHS) : Compliant

UNLESS OTHERWISE SPECIFIED : ALL DIMS IN MILLIMETERS TOLERANCES ON DECIMALS 1 PLACE ±0.20 ANGLE ±1.0° 1.6a 2 PLACE ±0.10 REMOVE BURRS. BREAK SHARP EDGES				THIRD ANGLE 		 MICROWAVE PASSIVE DEVICE	
DRAW	DESIGN	CHECK	APPRO.	TITLE			
<i>JM_PARK</i>	<i>WY_CHO</i>		<i>CU_LEE</i>	TNC JACK PRESS FIT RECEPTACLE			
Material	SEE NOTE 2			SIZE	DWG NO.	REV	
Finish	SEE NOTE 2			A4	T6001-310	A	
Scale : NS				Do Not Scale Drawing		1 of 1	