


SMB & 1.0/2.3 Termination


SMB Termination



P/N : JB001-110



P/N : JB002-110




DIMENSION


1.0/2.3 Termination



P/N : J1023-110



P/N : J1024-110

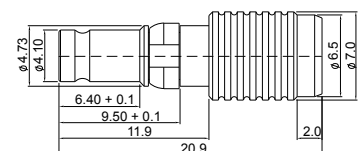

DIMENSION

Electrical

- Frequency Range ----- DC ~ 4 GHz
- Return Loss ----- 20 dB max
- Impedance ----- 50 Ohms
- RF Power
 - * Nominal ----- 1 Watts Average at 25°C
 - Derated Linearly to 0.5 Watt at 125°C
- Operating Temp Range --- -55°C to 125°C

Material

- Resistive Element -- Thin Film
- Resistor Substrat -- Alumina Ceramic
- Body ----- Gold Plated Brass
- Center Contact ----- Male : Gold plated Brass
- Female : Gold plated Beryllium copper
- C-ring ----- Nickel plated Brass